


ANTENNAS | HELI-8IS

HELI-8IS

2400 - 2500 MHZ BI-DIRECTIONAL TUNNEL ANTENNA

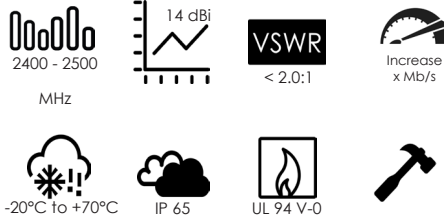

- Bi-directional
- Ruggedised
- Future proof

Product Overview

The tunnel antenna is the ideal antenna for 2.4-2.5 GHz wireless applications in tunnels. In tests, both the data rate and range achieved with this antenna was greater than obtained when using linearly polarized panel antennas of the same gain. The hardy construction of this antenna makes it ideal for the mining environment. A-HELI-0008 is a Bi-directional antenna whilst the closely related A-HELI-0003 fires in one direction.


Features


- High Gain
- Rugged Construction



Frequency bands


The HELI-8IS is a wide-band antenna that works from 2400 - 2500 MHz

 Indicates the bands on which this antenna works

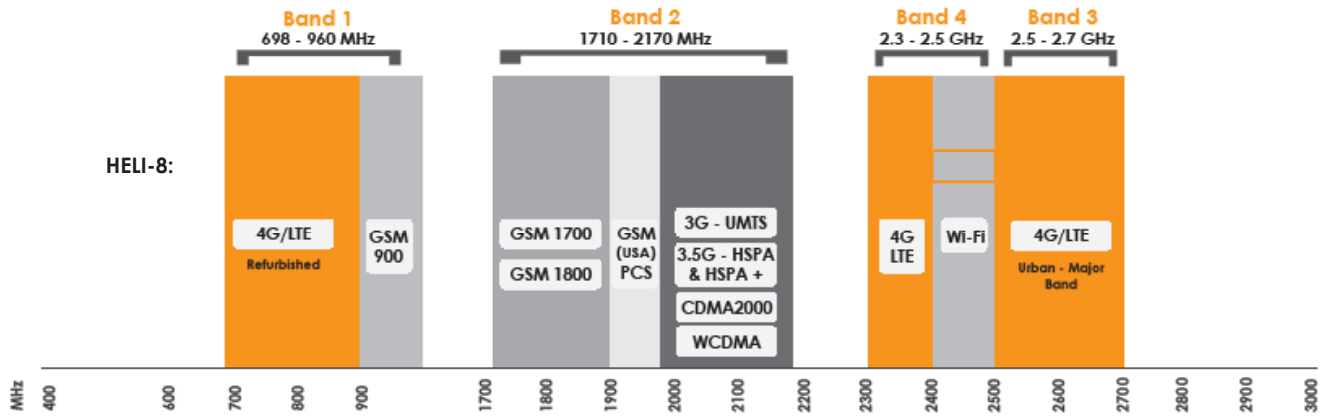

Antenna Performance Plots


VSWR:

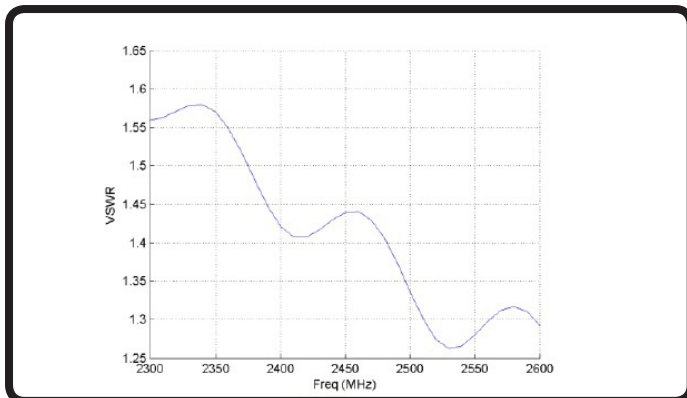

Voltage Standing Wave Ratio (VSWR)

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 2.0:1. The HELI-8IS delivers superior performance across all bands with a VSWR of < 2.0:1 or better.

Gain: (excluding cable loss)

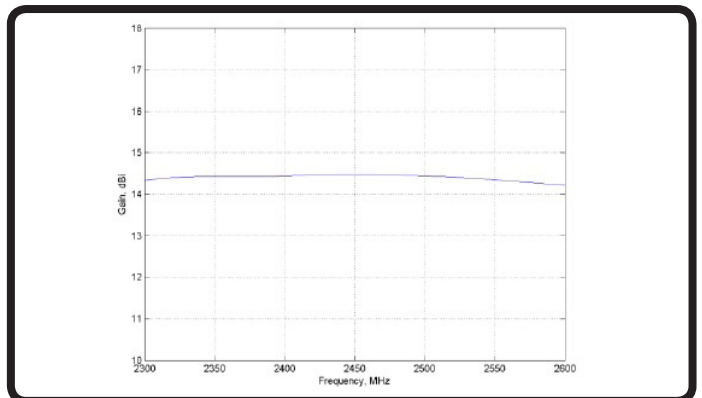

Gain* in dBi

14 dBi is the peak gain across all bands from 2400 - 2500 MHz


Gain @ 2400-2500 MHz:

14 dBi

*Antenna gain measured with polarisation aligned standard antenna

Radiation Patterns

H-Plane

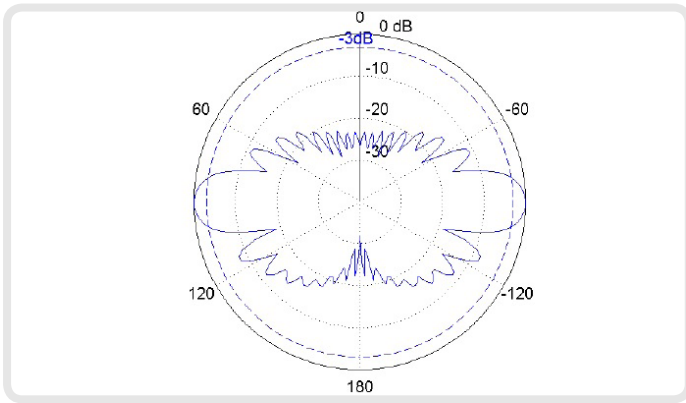

Electrical Specifications

Frequency Bands:	2400 - 2500 MHz
Gain (Max):	14 dBi
VSWR:	<2.0:1
Feed Power Handling:	10 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Circular
DC Short:	No

Environmental Specifications

Temperature Range (Operating):	-20°C to +70°C
Environmental Conditions:	Outdoor/Indoor
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non condensing
Storage Temperature:	-20°C to +70°C

Ordering Information

Commercial name:	HELI-8IS
Order Product Code:	A-HELI-0008IS
EAN number:	

Additional Accessories Available

Extension Cables:	None
-------------------	------

For more detailed information and availability in your region, visit our web site: www.poynting.tech

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Mechanical Specifications

Product Dimensions (L x W x D):	2050 mm x 140 mm x 140 mm
Packaged Dimensions:	2100 mm x 150 mm x 190 mm
Weight:	5.1 kg
Packaged Weight:	6.02 kg
Radome Material:	PVC
Radome Colour:	429C RAL 7038

Product Box Contents

Antenna:	A-HELI-0008IS
Mounting Bracket:	Four eyebolts for ceiling mount

The connector is factory mounted to the antenna



Certification Approvals and Standards

Flammability rating:	UL 94-V0 EN 13823
Water Ingress Protection Ratio/Standard:	IP 65 (NEMA 4X)
Impact resistance:	IK 08
Salt Spray:	MIL-STD 810F /ASTM B117
Product Safety:	Complies with UL, CE, EN, CSA and IEC standards



Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 208026538

E-mail: sales-europe@poynting.tech

HELI-8IS


©2015 Poynting Antennas (Pty) Ltd. All rights reserved.
Product Specifications may change without prior notice
Revised: October 2015

Regulatory Compliance: RoHS 2011/65/EU Compliant | ISO 9001:2008
Document version: TS-A-HELI-0008IS
www.poynting.tech


NOTES

- Capacitance as measured between the inner spiral and the base plate 3-30 pF
- Frequency 2.4-2.5 Ghz
- The A-HELI-0003 and A-HELI-A0008 are transducers that transforms the electrical currents and voltages received at its input terminals and radiates this energy in the form of an electromagnetic wave (and visa-versa)

A-HELI-0008-IS

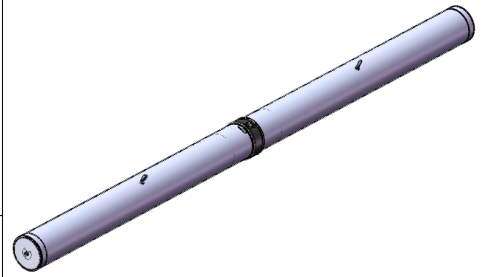


Equivalent Circuit

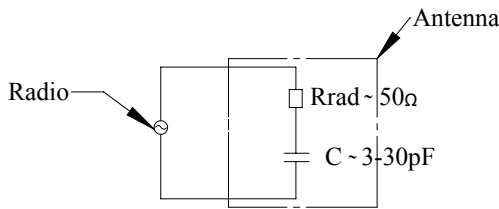


- Pmax = 87 mW
- Vmax = 2,95V
- Imax = 60mA

Surface resistivity:
1mΩ/□ to 15Ω/□


A-HELI-0003-IS



Electrical Schematic A-HELI-0008

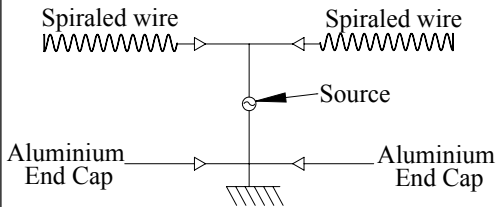

Electrical Schematic A-HELI-0003



© Copyright
All I.P. Rights reserved for:
Tel: 087 805 5050
Fax: (011) 262 6156
www.poynting.co.za

Scale (UOS):
Not To Scale
Drawing Size:
A4
Third Angle
Projection

Version	Date	Description	ECP no

THIS DOCUMENT MUST NOT BE USED FOR ANY OTHER PURPOSE THAN THAT FOR WHICH IT WAS SUPPLIED UNAUTHORISED COPYING OR REDISTRIBUTION IS STRICTLY PROHIBITED

Approved By	Signature	Date
Mark Haarhoff		

Title: Electrical Diagram, A-HELI-0003-IS & A-HELI-0008-IS	
Part no:	Version:
Author: Shane Mundy	5.0