

Wideband Cellular Embedded Antenna

TFWB-6-60[-X]

TFWB-6-60[-X]

- Wideband cellular 4G/5G FPCB dipole antenna
- Supports 617-960/1427-6000MHz
- Ultra-flexible adhesive mount antenna
- Fitted 1.13 coax cable with UFL plug


The TFWB-6-60[-X] antenna is a ground plane independent flexible PCB (FPCB) dipole antenna covering global cellular frequencies (617-960/1427-6000MHz) developed for embedded applications.

Designed for mounting on non-conductive surfaces the TFWB-6-60[-X] range is installed via a high performance adhesive backing layer and is supplied with integrated C113 cable fitted with a right angle UFL plug.



Technical Drawing

TFWB-6-60-VARUFL Shown

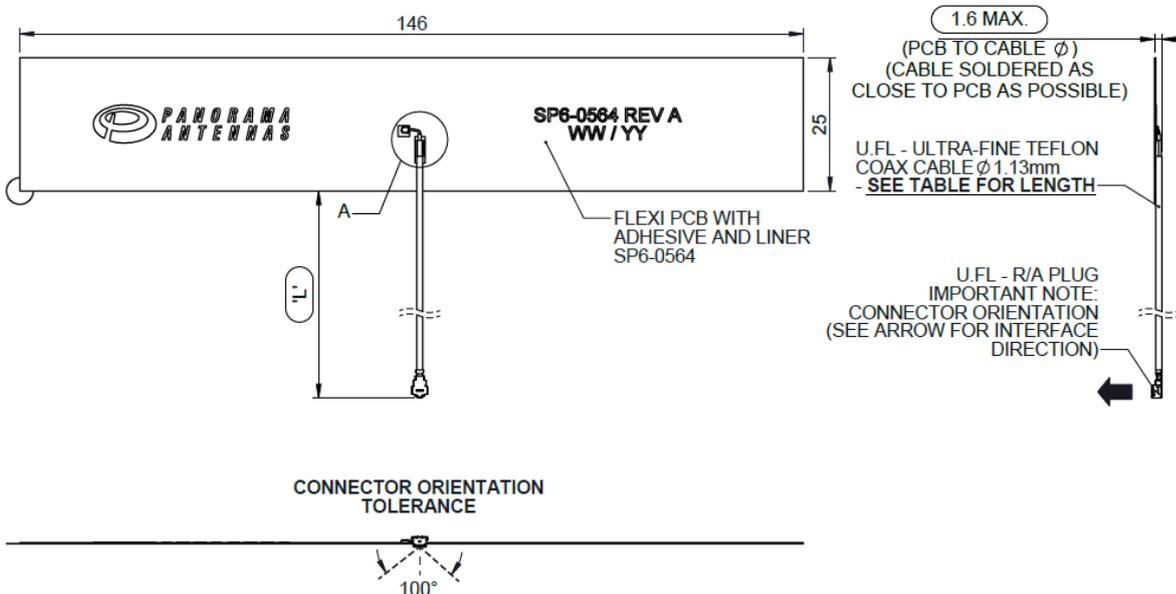

Wideband Cellular Embedded Antenna

TFWB-6-60[-X]

Product Data

Part No.		TFWB-6-60-005UFL	TFWB-6-60-01UFL	TFWB-6-60-02UFL
Electrical Data				
Frequency Range (MHz)		617-960/1427-6000		
Typical VSWR		<3:1		
Typical Peak Gain	617-960MHz	2.4dBi		
	1710-2700MHz	5.8dBi		
	3300-4900MHz	8.0dBi		
	5150-6000MHz	7.3dBi		
Typical Efficiency	617-960MHz	71%		
	1710-2700MHz	79%		
	3300-4900MHz	82%		
	5150-6000MHz	70%		
Polarisation		Linear		
Pattern		Omni-directional		
Impedance		50Ω		
Max Input Power (W)		5		
Mechanical Data				
Dimensions (mm)	Length	146 (5.75")		
	Width	25 (1")		
	Thickness	1.6 (0.06")		
Material		Flexible PCB substrate with adhesive backing		
Operating Temp (°C)		-40° / 176°F (-40° / +80°C)		
Colour		Black		
Cable Data				
Type		C113		
Diameter (mm)		1.13 (0.04")		
Length (mm)		50 (2")	100 (4")	200 (8")
Termination		R/A UFL Plug		

*VSWR, peak gain and efficiency measured on 2.5mm (0.1") ABS sheet with 100mm (4") cable. Efficiency is average across stated bands. VSWR stated across 90% of relevant frequency bands.

Wideband Cellular Embedded Antenna

TFWB-6-60[-X]


Electrical Data in
Free Space - Cell

Measurement Conditions	4G/5G Antennas				
Measured in 3D anechoic chamber on a 2.5mm (0.1") ABS sheet	Frequency Range (MHz)	LTE/NR Bands	Antenna Element	Peak Gain (dBi)	Efficiency (%)
	617-698	71, 105	Cell	2.4	86
	699-798	12,13, 14 17,28	Cell	2.4	85
	807- 862	5,19,20,26,27	Cell	1.7	65
	880-960	8	Cell	0.5	48
	1427-1518	11, 21, 74,75,76	Cell	2.8	63
	1710-1920	2,3,4,9,25,35,39,66	Cell	3.9	70
	1920-2170	1,23	Cell	4.0	77
	2300-2400	30,40	Cell	4.5	90
	2496-2690	7,38,41	Cell	5.8	93
	3300-4200	22,42,43,48,77,78	Cell	7.5	82
	4400-5000	79	Cell	8.0	83
	5000-6000	96, 102, 104	Cell	7.3	70


Wideband Cellular Embedded Antenna

TFWB-6-60[-X]


Electrical Data in Free Space - Cell

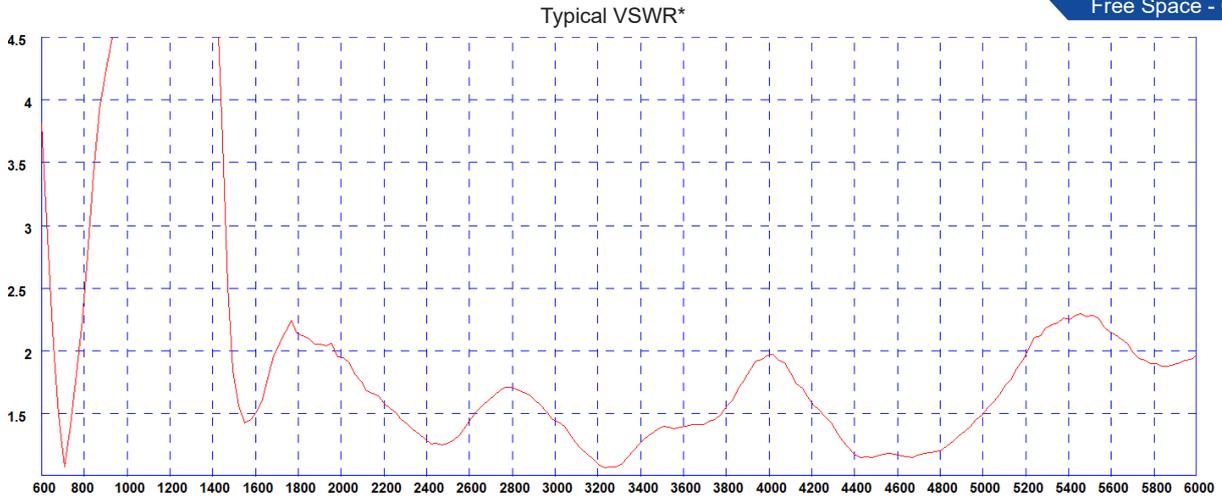

*VSWR measured on 2.5mm (0.1") ABS sheet with 100mm (4") cable

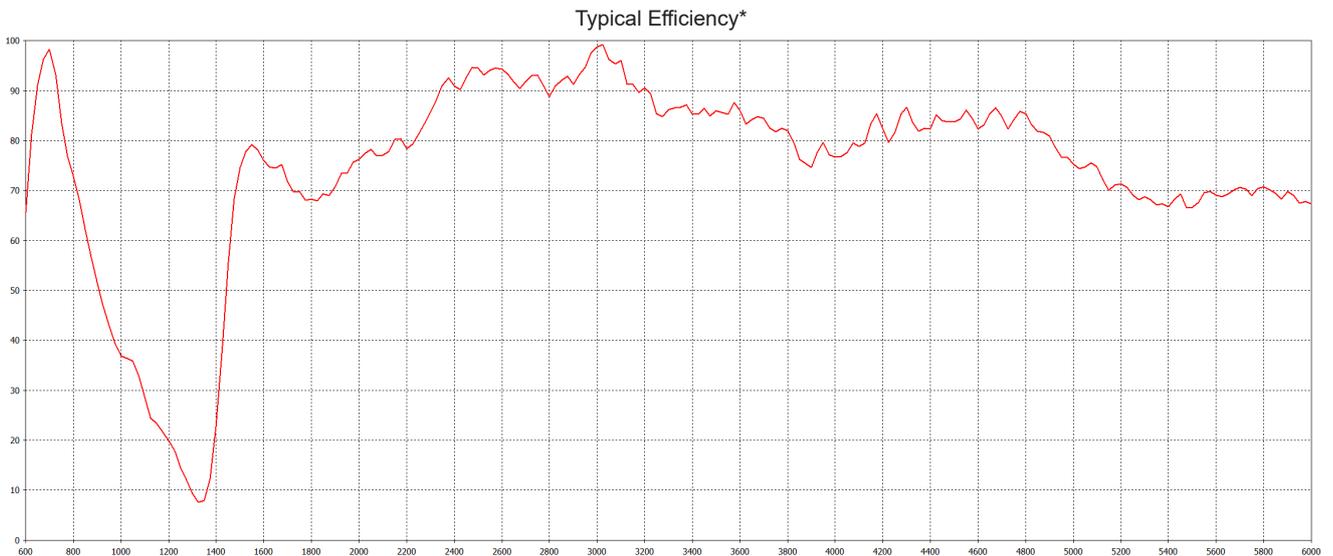

*Efficiency measured on 2.5mm (0.1") ABS sheet with 100mm (4") cable

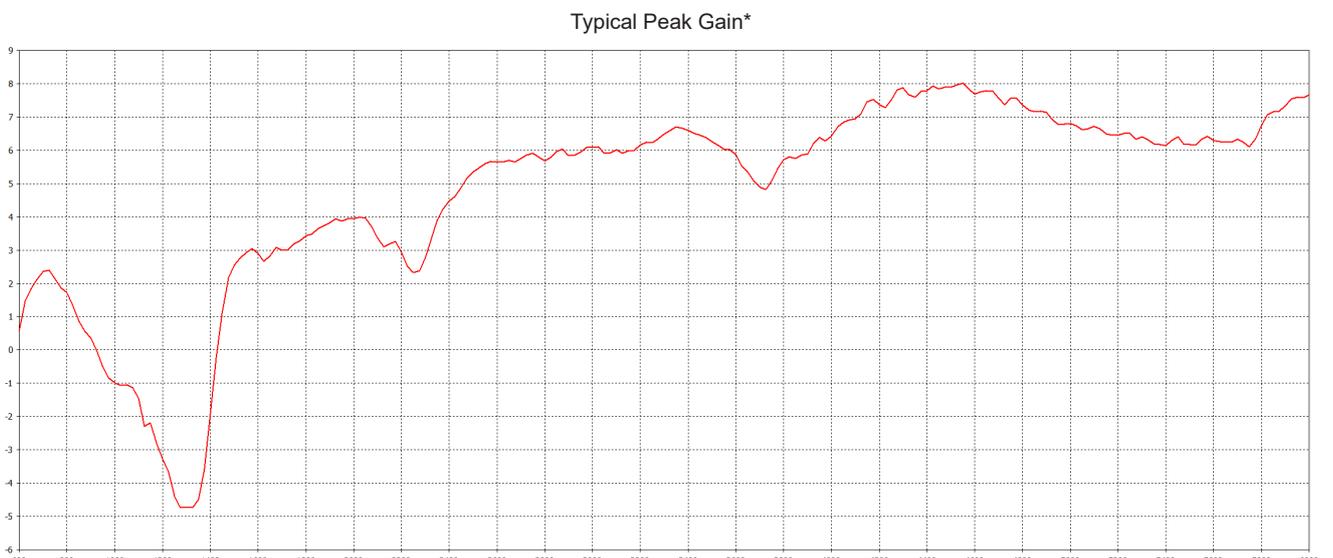


*Peak gain measured on 2.5mm (0.1") ABS sheet with 100mm (4") cable

Wideband Cellular Embedded Antenna


TFWB-6-60[-X]

3D Pattern Data in Free space - Cell


Typical 3D Pattern- Cell A - 650 MHz

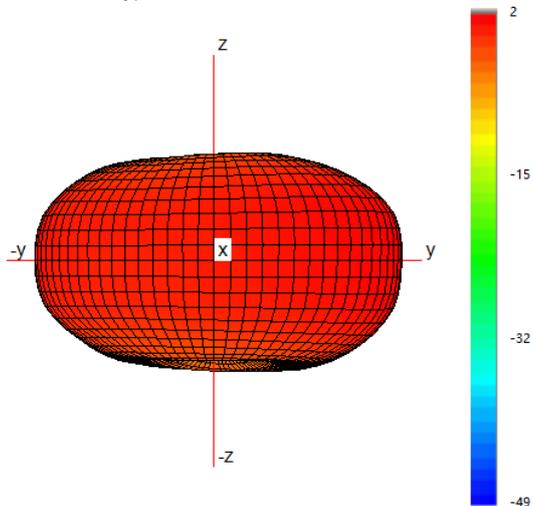


Typical H Plane- Cell A - Patterns- 600-700MHz

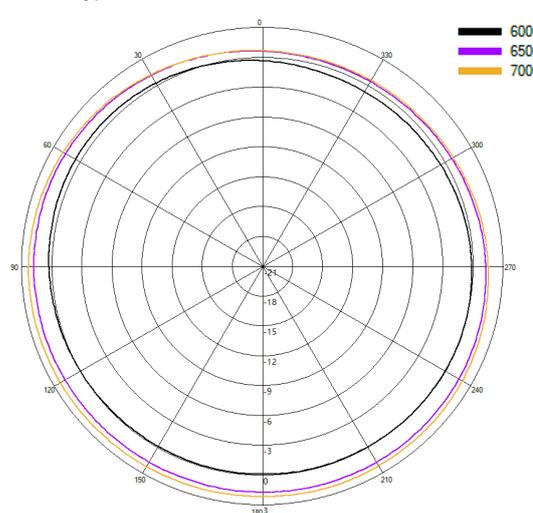


Typical 3D Pattern- Cell A - 750 MHz

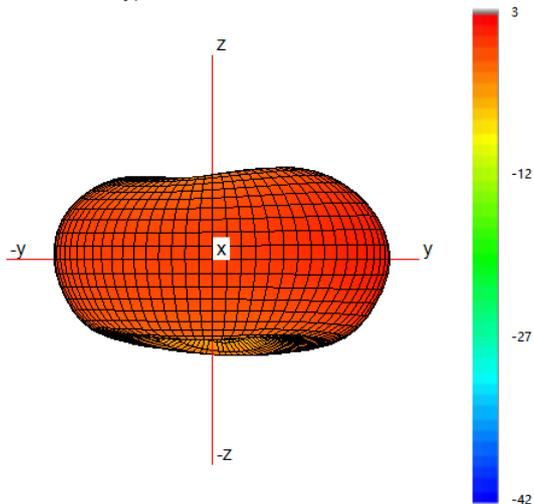


Typical H Plane- Cell A - Patterns- 700-800MHz

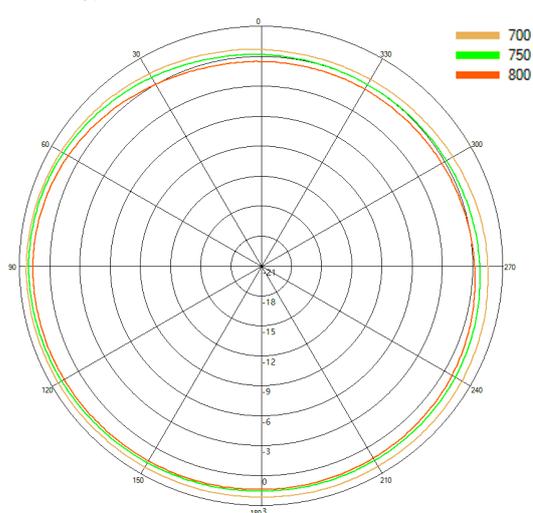

Typical 3D Pattern- Cell A - 850 MHz

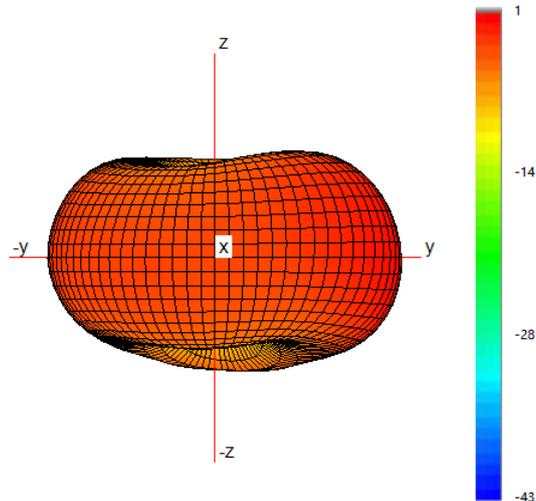

Typical H Plane- Cell A - Patterns- 800-900MHz

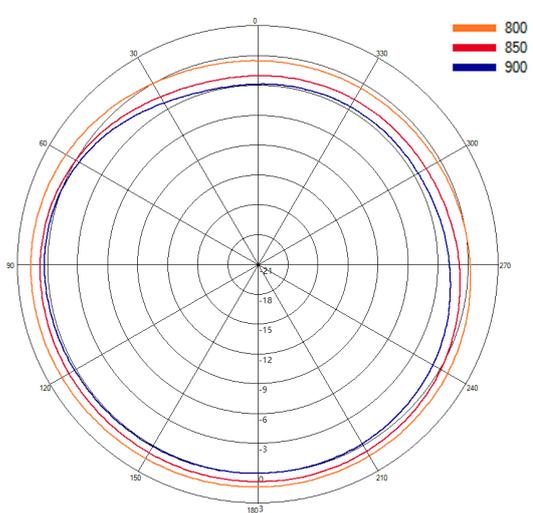


Wideband Cellular Embedded Antenna


TFWB-6-60[-X]

3D Pattern Data in Free space - Cell


Typical 3D Pattern- Cell A - 1475 MHz

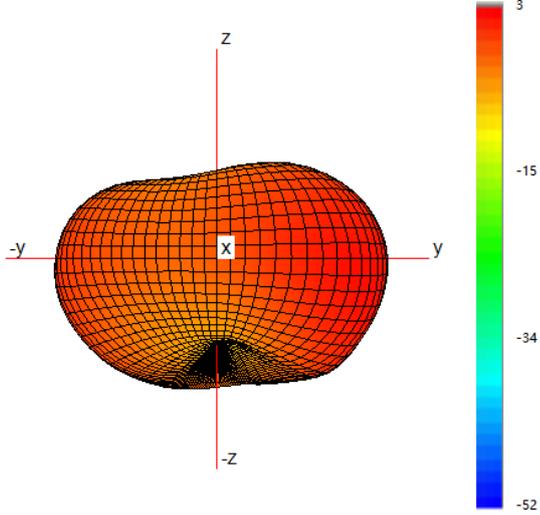


Typical H Plane- Cell A- Patterns- 1450-1500 MHz

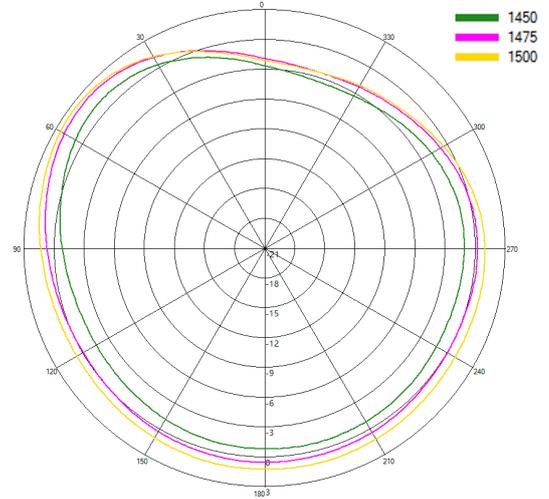


Typical 3D Pattern- Cell A - 1800 MHz

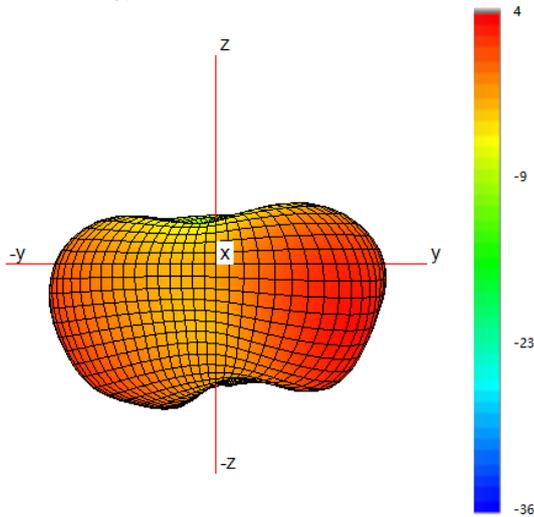


Typical H Plane- Cell A- Patterns- 1750-1850 MHz

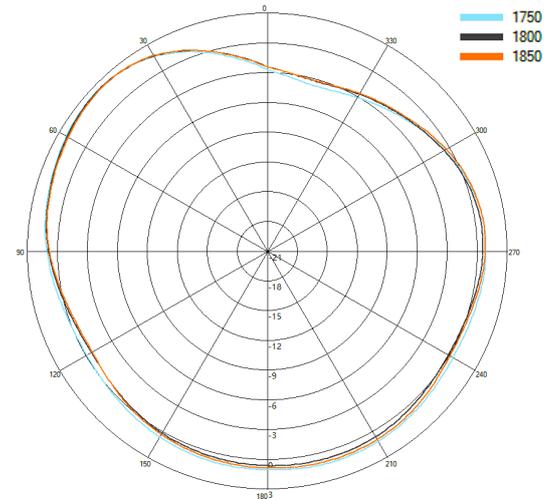

Typical 3D Pattern- Cell A - 2150 MHz

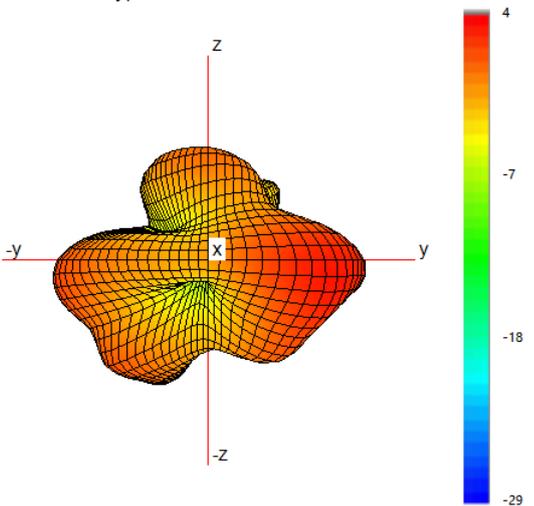

Typical H Plane- Cell A- Patterns- 2100-2200 MHz

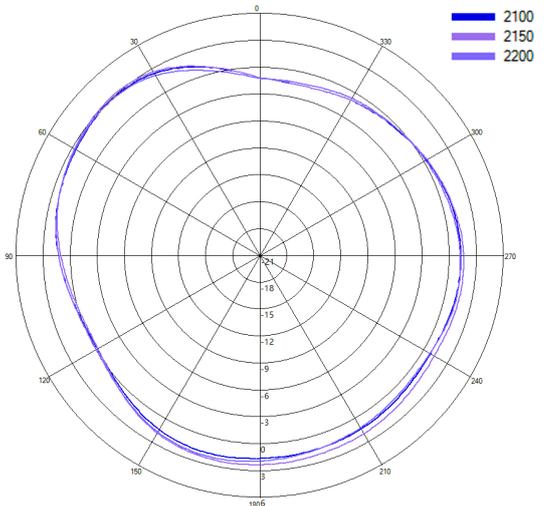


Wideband Cellular Embedded Antenna


TFWB-6-60[-X]

3D Pattern Data in Free space - Cell


Typical 3D Pattern- Cell A - 2350 MHz

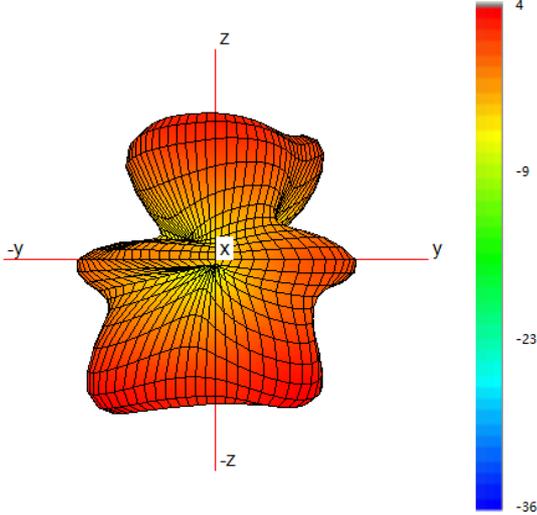


Typical H Plane- Cell A - Patterns- 2300-2400 MHz

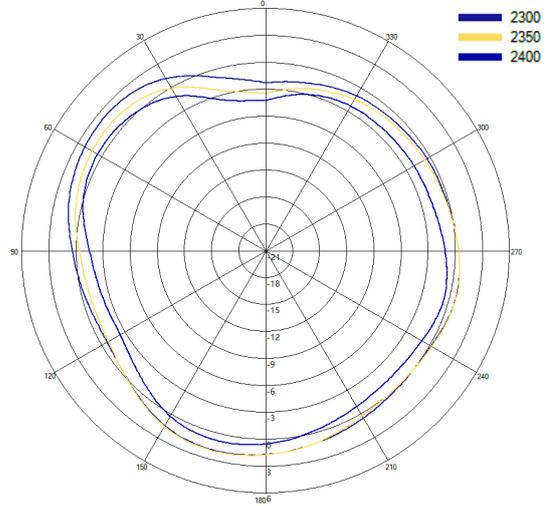


Typical 3D Pattern- Cell A - 2650 MHz

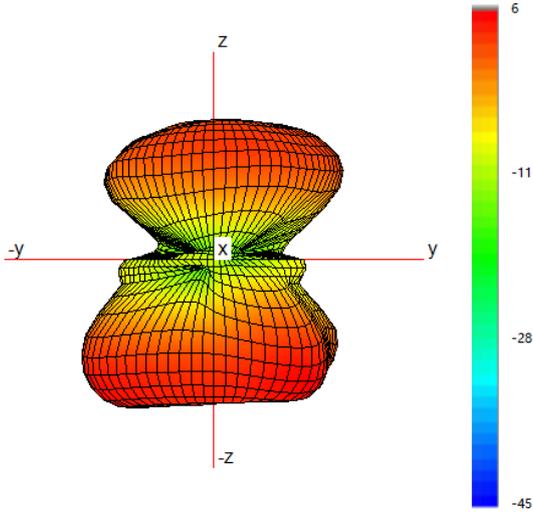


Typical H Plane- Cell A - Patterns- 2600-2700 MHz

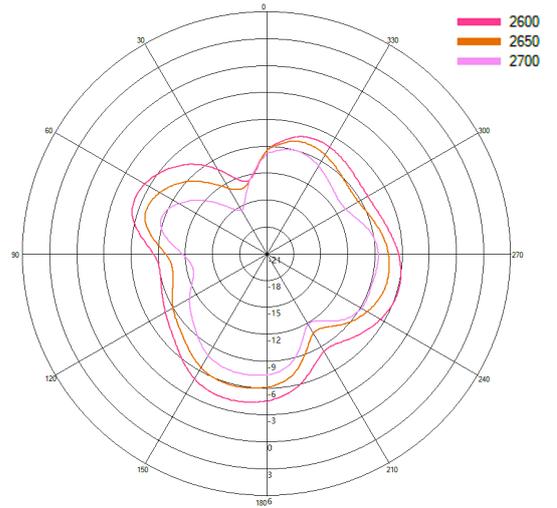

Typical 3D Pattern- Cell A - 3600 MHz

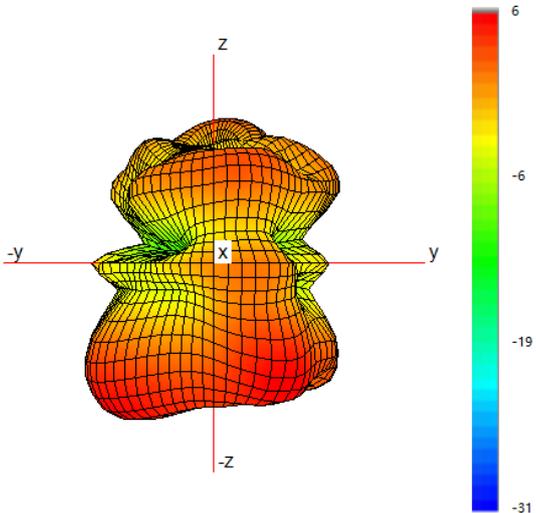

Typical H Plane- Cell A - Patterns- 3400-4000 MHz

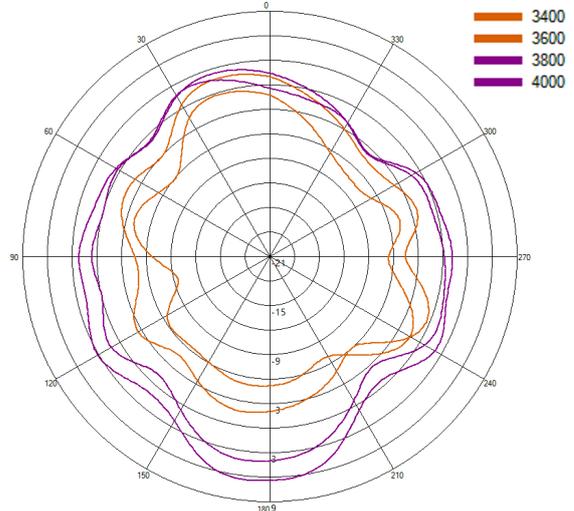


Wideband Cellular Embedded Antenna


TFWB-6-60[-X]

3D Pattern Data in Free space - Cell


Typical 3D Pattern- Cell A - 4700 MHz

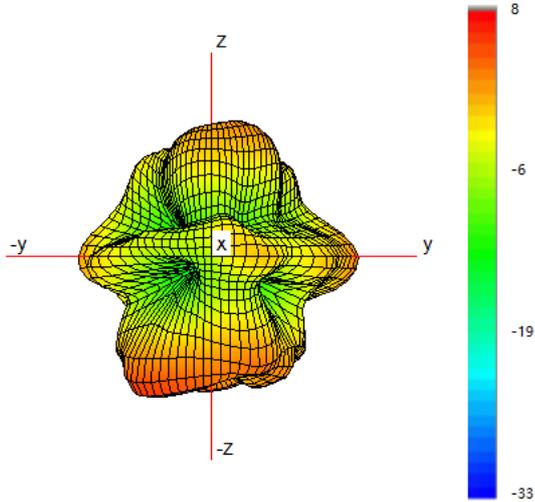

Typical H Plane- Cell A - Patterns- 4400-4800 MHz

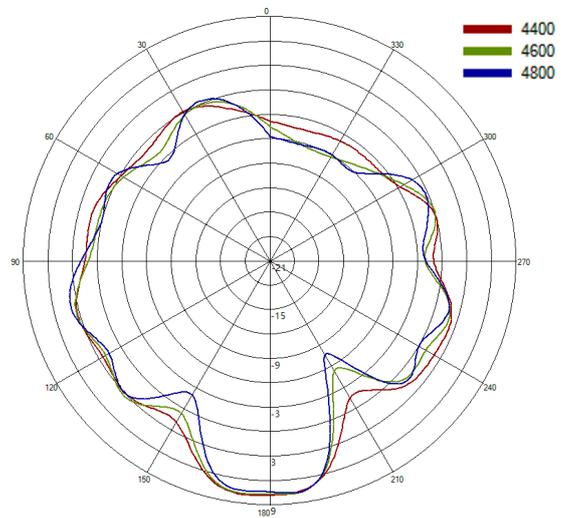

Typical 3D Pattern- Cell A - 5600 MHz

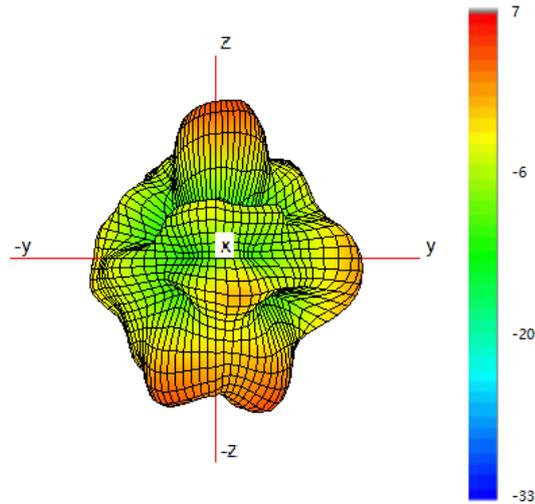

Typical H Plane- Cell A - Patterns- 5400-5800 MHz

